


Technische Daten der Gewinde A P I

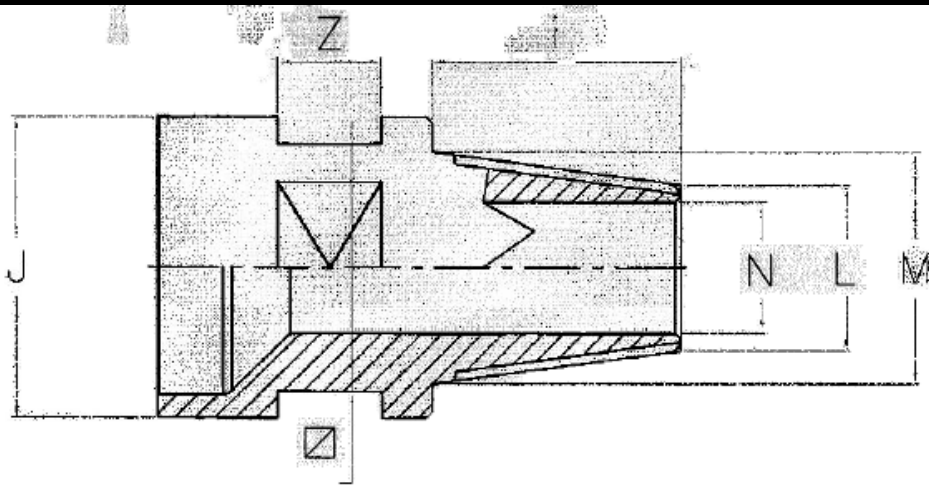

J	FILETTO	Z	Ø	i	L	M	N
76	2 _{3/8} REGULAR	40	65	76,2	47,61	66,67	30
90	2 _{3/8} I.F.	40	65	76,2	60,34	73,05	40
90	2 _{7/8} REGULAR	40	65	88,9	53,97	76,209	30
114	3 _{1/2} REGULAR	40	95	95,25	65,07	88,9	40
114	2 _{7/8} I.F.	40	95	88,9	71,32	86,131	50
114	3 _{1/2} FULL HOLE	40	95	95,25	77,62	101,447	55
127	3 _{1/2} I.F.	40	105	101,6	85,06	102,006	55
140	4 _{1/2} REGULAR	40	110	107,95	90,47	117,475	55
140	4 I.F.	40	110	114,3	103,73	122,78	80
140	3 _{7/8} I.F.	40	110	110	93,86	112,2	55
140	4 FULL HOLE	40	110	114,3	89,66	108,712	55
140	4 _{1/2} FULL HOLE	40	110	101,6	96,32	121,716	55
168	4 _{1/2} I.F.	40	140	114,3	114,3	133,35	80
180	6 _{5/8} REGULAR	40	160	127	131,04	152,196	90
200	7 _{5/8} REGULAR	40	180	133,35	144,46	177,80	90
250	8 _{5/8} REGULAR	40	220	136,525	167,84	201,988	120